

REPORT DOCUMENTATION PAGE			Form Approved OMB NO. 0704-0188		
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA, 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</p>					
1. REPORT DATE (DD-MM-YYYY) 23-01-2012		2. REPORT TYPE Conference Proceeding		3. DATES COVERED (From - To) -	
4. TITLE AND SUBTITLE Circularly Polarized Emission from Colloidal Nanocrystal Quantum Dots Confined in Sculptured Thin Film Based Microcavities			5a. CONTRACT NUMBER W911NF-06-1-0211		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER 611102		
6. AUTHORS Jian Xu, Fan Zhang, Akhlesh Lakhtakia, Sean M. Pursel, Michael Gerhold			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAMES AND ADDRESSES Pennsylvania State University Office of Sponsored Programs The Pennsylvania State University University Park, PA 16802 -7000				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Office P.O. Box 12211 Research Triangle Park, NC 27709-2211				10. SPONSOR/MONITOR'S ACRONYM(S) ARO	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) 49653-EL.36	
12. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.					
14. ABSTRACT We report the simultaneous control of the polarization state and emission bandwidth of colloidal nanocrystal quantum dots by embedding them in chiral reflector-based microcavities. Significant improvements in directionality and color purity have been observed in the polarized light output arising from the enhanced coupling between the NQD-excitons and the confined electromagnetic field.					
15. SUBJECT TERMS polarization,colloidal nanocrystal,quantum dots,microcavities					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	15. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON Jian Xu
a. REPORT UU	b. ABSTRACT UU	c. THIS PAGE UU			19b. TELEPHONE NUMBER 814-863-0721

Report Title

Circularly Polarized Emission from Colloidal Nanocrystal Quantum Dots Confined in Sculptured Thin Film Based Microcavities

ABSTRACT

We report the simultaneous control of the polarization state and emission bandwidth of colloidal nanocrystal quantum dots by embedding them in chiral reflector-based microcavities. Significant improvements in directionality and color purity have been observed in the polarized light output arising from the enhanced coupling between the NQD-excitons and the confined electromagnetic field.

Conference Name: 2007 Conference on Lasers and Electro-Optics (CLEO)

Conference Date: May 06, 2007

Circularly Polarized Emission from Colloidal Nanocrystal Quantum Dots Confined in Sculptured Thin Film Based Microcavities

Jian Xu, Fan Zhang, Akhlesh Lakhtakia, Sean M. Pursel

Department of Engineering Science and Mechanics, Penn State University, State College, PA 16802

jianxu@engr.psu.edu, Tel: (814) 863-0721, Fax: (814) 865-9974

Michael Gerhold

Engineering Sciences Directorate, Army Research Office, RTP, NC 27709

Abstract: We report the simultaneous control of the polarization state and emission bandwidth of colloidal nanocrystal quantum dots by embedding them in chiral reflector-based microcavities. Significant improvements in directionality and color purity have been observed in the polarized light output arising from the enhanced coupling between the NQD-excitons and the confined electromagnetic field.

In comparison to many efficiently luminescent materials, a distinct feature of semiconductor nanocrystal quantum dots (NQDs) is that their emission properties are highly susceptible to modification due to characteristics in many application environments. The emission wavelength can simply be tuned by varying the size and/or the material composition of nanoparticles during fabrication, even though their chemical properties remain substantially invariant. Therefore, the same NQD-device configuration can be adopted for different nanocrystals to emit over a broad wavelength regime, covering the visible (0.4-0.8 μm) and near-infrared (0.8-2.5 μm) spectral regimes.^{1,2,3} Of equal importance is the control of the polarization state and bandwidth of the NQD emission for potential applications in bio/chemical sensing, multispectral imaging, quantum computing and cryptography, polarized optical interconnects, spintronics, etc.^{4,5} We report in this conference the observation of narrow-bandwidth circularly polarized (CP) emission from a thin layer of semiconductor nanocrystals embedded in a polarization-selective resonant microcavity. The microcavity consists of two sculptured-thin-film (STF)-based chiral mirrors separated by a spacer layer. The polarization-dependent reflection of the structurally left/right-handed STF chiral reflectors inhibits the presence of right/left CP, which induces the resonance of left/right CP^{6,7}. When the nanocrystals are sandwiched between the chiral mirrors, the confinement applied by the microcavity will alter the density and polarization state of the optical modes within it, and spatially and spectrally redistribute the emission output. The enhanced coupling between the NQD-excitons and the confined electromagnetic field will result in CP emission from the embedded NQDs with significant improvement in light output directionality and color purity.

Figure 1 shows a schematic drawing of the structure of the microcavity device containing NQD emitters. A layer of CdSe/CdS nanocrystals, inserted between two spacer layers of SiO₂, was enclosed by top and bottom chiral STF mirrors, which were structurally left-handed comprising 6 structural-periods. The left-hand and right-hand circularly polarized (LCP and RCP) emissions of the photopumped core/shell NQDs coupled in the microcavity were resolved in the measurement and plotted in Figure 2. The free-space luminescence of the core/shell-NQD layer is also included in the figure for the sake of comparison. It has been observed that the LCP and RCP light emitted by the cavity-coupled NQDs exhibit significant differences in intensity and bandwidth: the FWHM bandwidths of the LCP and RCP emissions are 9.36nm and 21.55 nm, respectively, while the peak intensity of the LCP emission is four times higher than that of the RCP emission. By optimizing the chiral-reflector performance, a complete suppression of the RCP emission is predicted by our calculation results, which leads to the pure LCP output from the cavity-embedded NQDs.

The spatial distribution of radiation power (emission pattern) of the NQDs in microcavity was measured and plotted in Figure 3. The measured Lambertian-radiation pattern of the free-space luminescence of NQDs is also plotted for reference. It is evident that the introduction of microcavity structure brings about a drastic change of NQD emission patterns, which is, again, due to the non-uniform

spatial distribution of the density of photon states in the microcavity. The emission from the NQDs within the cavity can therefore be strongly directed vertically from the mirror surface if proper cavity design is adopted. Due to the simple and cost effective fabrication of the microcavity devices combined with their favorable optical emission properties with excellent stability also above room temperature, such devices might be attractive alternatives to currently available commercial laser diodes operating in this spectral range. To this end, the electrically pumped microcavity light emitting diodes (LEDs) is envisaged. We have recently demonstrated the stable operation of non-cavity NQD-LEDs at high brightness ($\sim 4000\text{cd/m}^2$) over hundreds of hours (Fig. 4), showing the potential of achieving high-performance microcavity NQD-LEDs in the near future.

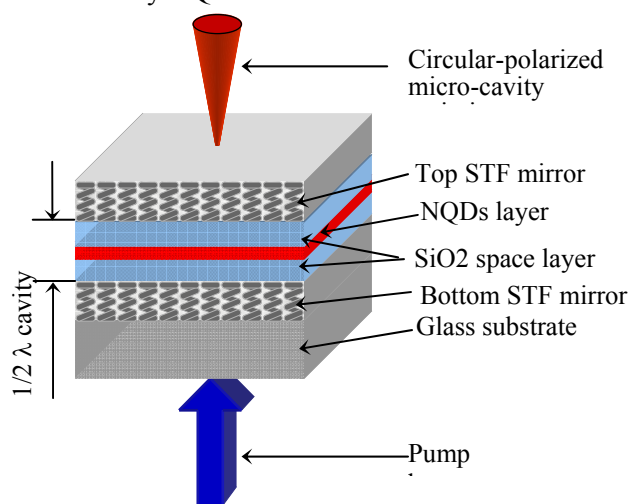


Fig.1 Schematic drawing of the structure of the microcavity device

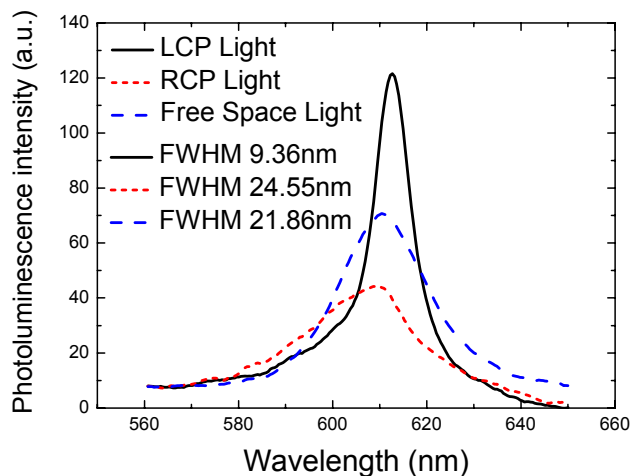


Fig.2 PL spectra of LCP, RCP and free space lights

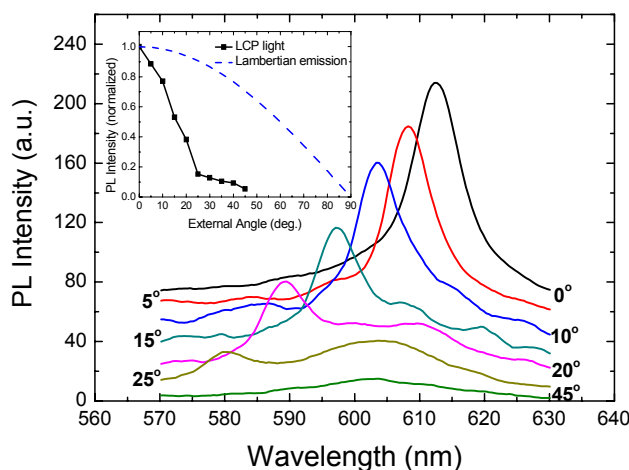


Fig.3 PL spectra of LCP light as a function of the detection angle. The inset shows the spatial distribution of radiation power of LCP light

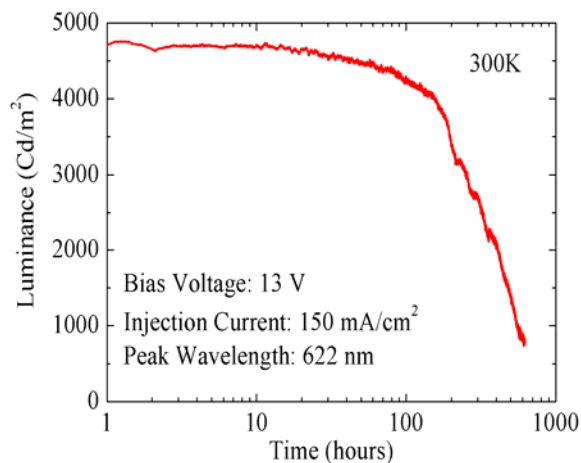


Fig. 4 Lifetime characterization of the NQD-EL performance

Reference

1. C. B. Murray, C. R.; Bawendi, M. G. Annual review of materials science **2000**, 30, 545–610.
2. V. I. Klimov, "Semiconductor and metal nanocrystals synthesis and electronic and optical properties", Marcel Dekker, 1st edition, 2004
3. X. Peng et al., J. AM. CHEM. SOC. **124**, 2049-2056 (2002)
4. A. Dodabalapur et al. Appl. Phys. Lett. **64** (19) 9, May 1994.
5. C.E. Finlayson et al. Appl. Phys. Lett. **77** (16), 16 Oct. 2000.
6. A. Lakhtakia and R. Messier, Sculptured Thin Films: Nanoengineered Morphology and Optics (SPIE Press, Bellingham, WA, USA, 2005).
7. Q. Wu, I.J. Hodgkinson, and A. Lakhtakia, Opt. Eng. **39** (2000) 1863